


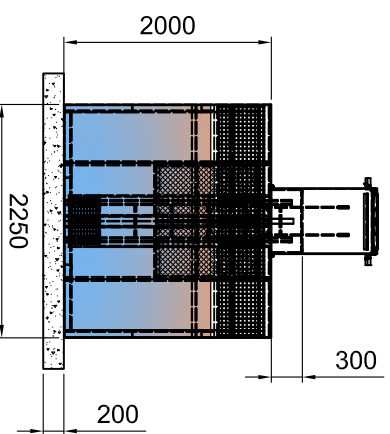
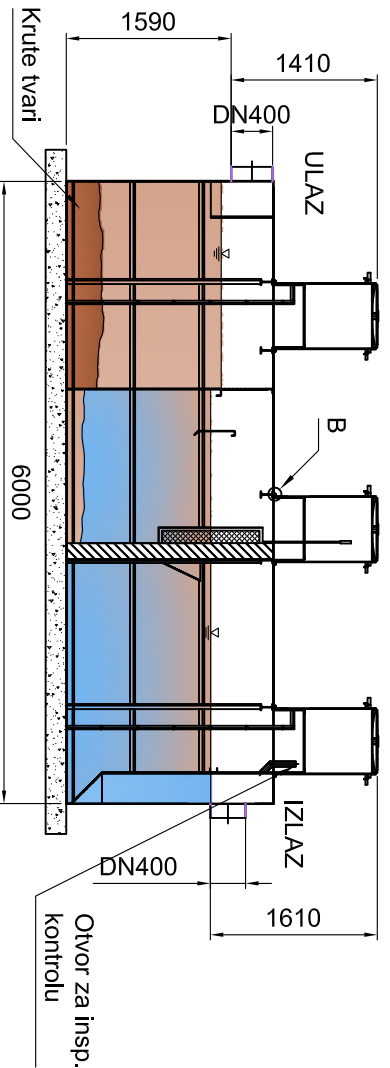


Presjek A-A

Teleskopska klizna
grla hoda 300mm

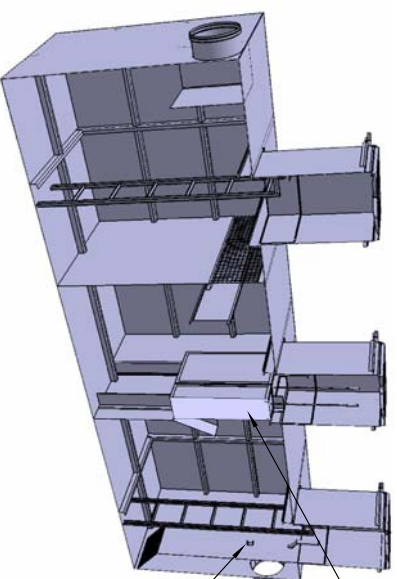


Regulacija kliznih
grla vijcima M12x25

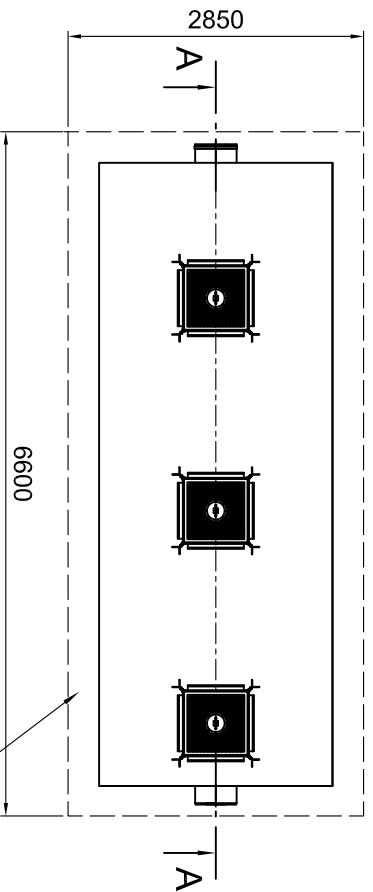


Koalescentni
uložak

Kontrola
opterećenosti



Polipropilenski
koalescentni
uložak

AB podloga
Čelični anker

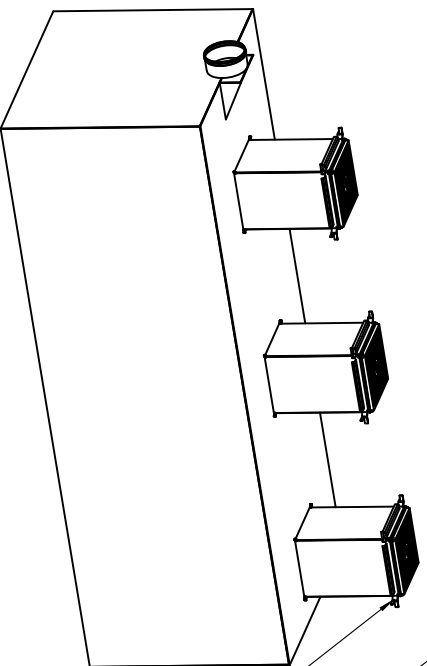

Separatori spadaju u I. klasu separatora
prema hrvatskoj normi HRN EN 858 što
znači da je količina rezidualnog ulja manja
od 5 mg/l

Volumen separatora: 25000 l
Protok separatora: 100 l/s
Cijevi: korugirane DN400
Masa praznog separatora: 4800kg
Masa punog separatora: 24500 kg

Mjerilo	1:50	Pozicija	Masa
	-	EN 858	-

Ime	Datum	Potpis
Čitao		
Levačić I. dipl.ing.str.		
Prekontrol		
Horvat D.mng.ing.mech.		
Odobrio		
Horvat Dj. str.teh.secc.		

Separator 25000
Q=100 llt/sec

rad.bilj.	Promjena	Datum	Ime	Spremljeno

Tehnix
TX-DK-D-1907-SEP-25000-S1

